
One-Click Fiber Optic Cleaner Pen

LC/Mu 1.25mm Ferrules

Fiber Optic Cleaner-Mini Designed to specially work well with the SC, FC, and ST connectors, this instrument cleans the ferrule end faces removing dust, oil, and other debris without nicking or scratching the end face.



Product View

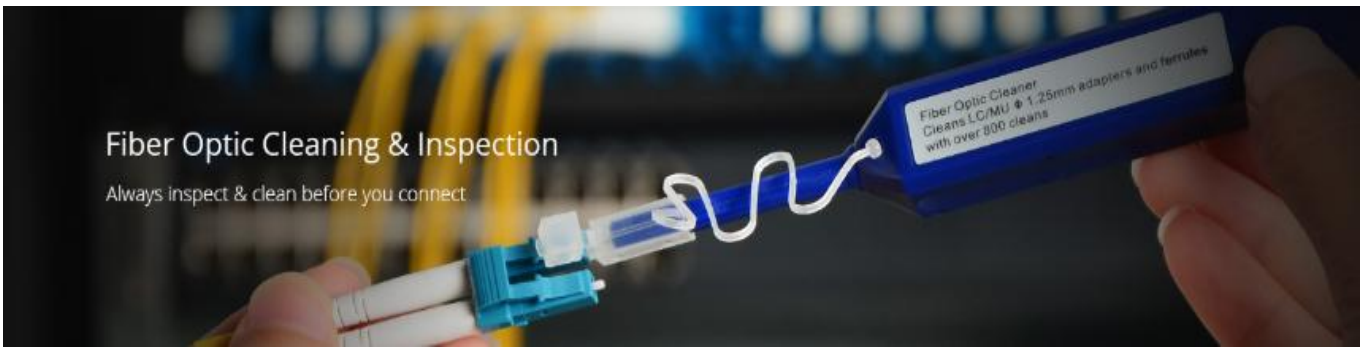

Description

The one-click fiber optic cleaner pen is easy to use and can be used to clean LC/MU connectors and exposed 1.25mm collars in the fiber optic cable adapter. Simply insert the cleaner into the adapter and push it until you hear a "click". The push cleaner uses a mechanical push operation to push the optical-grade cleaning tape while rotating the cleaning head to ensure that the fiber end surface is effective but gentle clean.

Specifications

Product Series	Fiber Optic Cleaner Pen
Connector	LC/MU 1.25MM
No. of Cleaning Times	800+
Polish Type	PC/UPC/APC
Dimension	175mm x 18mm x 18mm

Product Features



Single click activation, lightweight and safe
Anti-static design prevents secondary contamination
Easy to use and efficient, extendable tip reaches recessed connectors
Anti-static design prevents secondary contamination
Disposable with 800+ cleanings per unit


Cleaning micro fibers are densely stranded and debris free

Easy pushing motion engages connector and initiates cleaner, audible click when engaged


Application

Fiber network panels and assemblies
Outdoor FTTX applications
Cable assembly production facility
Testing laboratories
Server, switches, and routers with LC/MU interface


How to operate?

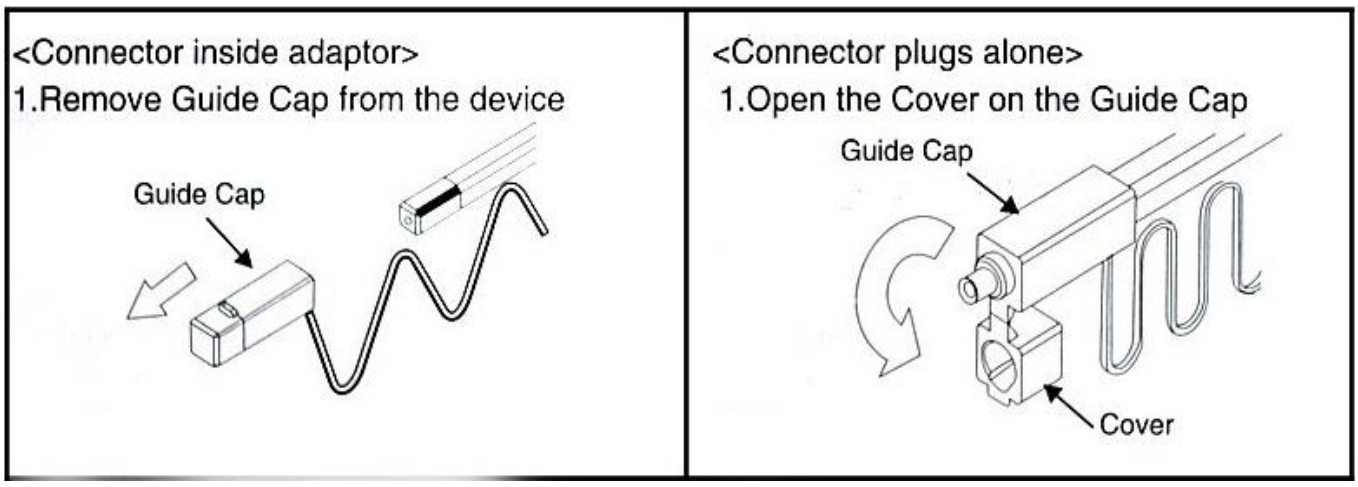

2.Insert tip of cleaner into MU/LC Adaptor

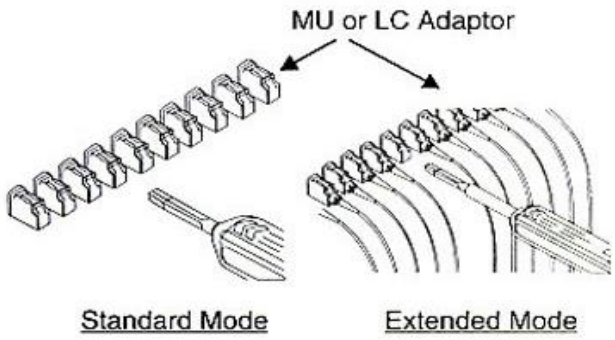


3.Push the Outer Shell to start cleaning the MU/LC connector end face .A "click" sound indicates end of cleaning process. Close the cover after use.

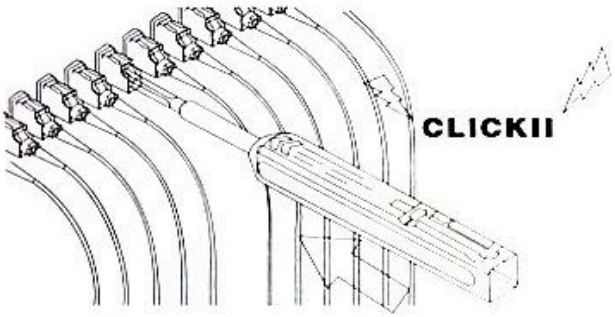


Be careful not to slant the One-Click Cleaner MU/LC while inserting into the adapter.
Do not overly exert force during insertion as this may cause damage to both the connector and the One-Click Cleaner MU/LC.
If pushing Outer Shell is inhibited,remove One -Click Cleaner MU/LC form adapter and ensure that there is no sizeable debris inhibiting the cleaning process.


2.Insert MU/LC connector into the Guide Cap

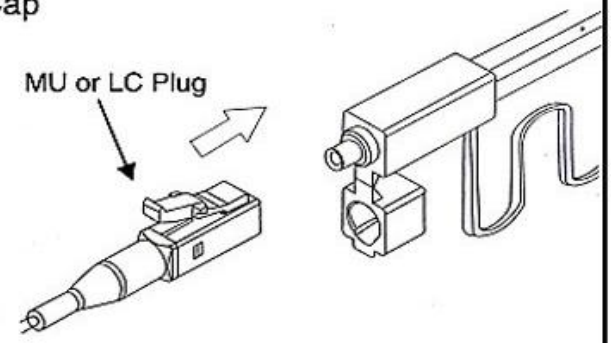

3.Push the Outer Shell to start cleaning the MU/LC connector end face.A "click" sound indicates end of cleaning process. Close the cover atfer use.

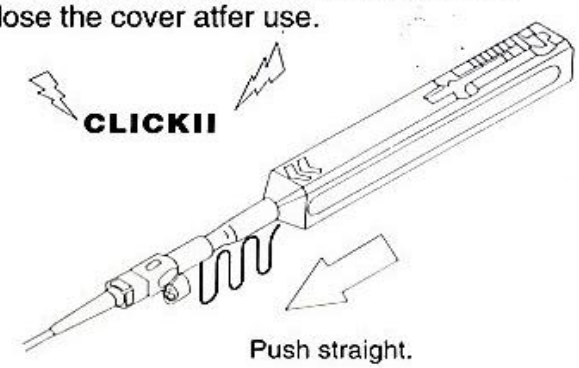


Be careful not to slant the MU/LC connector while inserting into the Guide cap.
Do not overly exert force during insertion as this may cause damage to both the connector and the One-Click Cleaner MU/LC.
If pushing Outer Shell is inhibited,remove One -Click Cleaner MU/LC from adapter and ensure that there is no sizeable debris inhibiting the cleaning process.

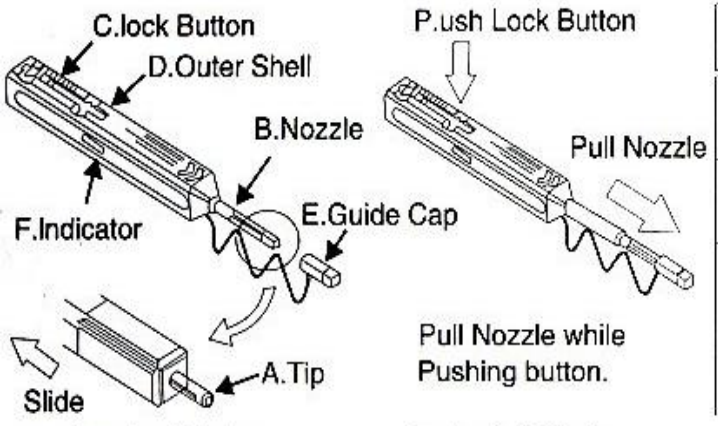

Standard Mode

Pull Nozzle while Pushing button.


Extended Mode

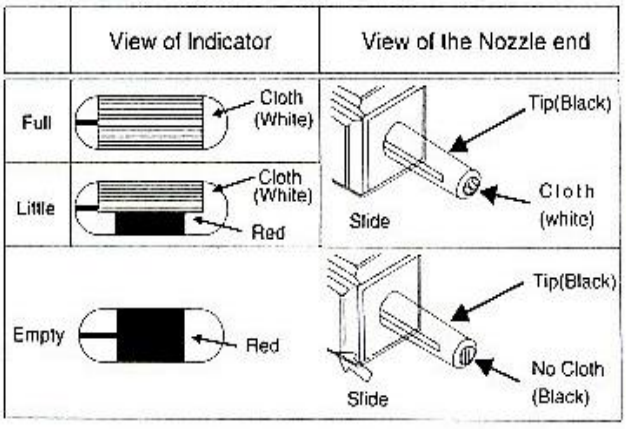

Identification of remaining cloth

Testing Result

Before

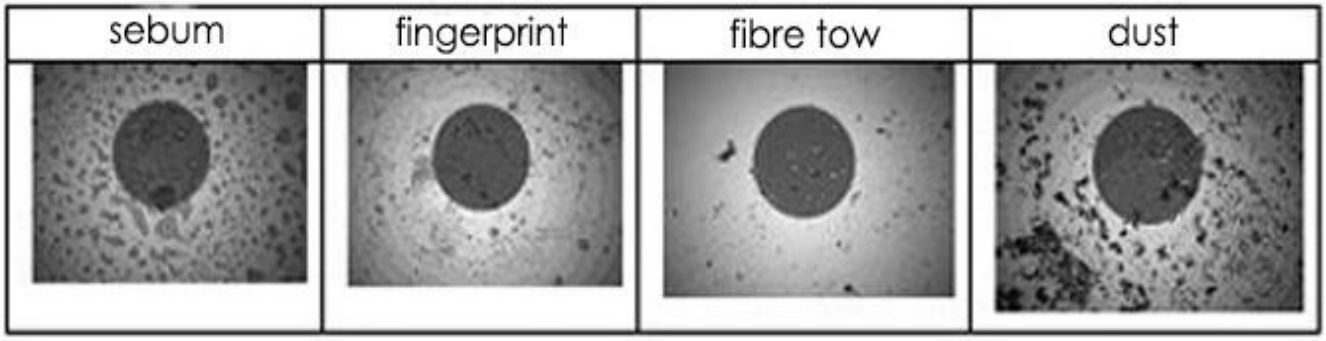

After

